


SP ULA 160
Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.
Available in several colours and sizes.

Typology: SUSPENDED LAMP

Ratings
- Built in LED module
- CCT 3000 K
- Downlight or uplight
- Surface installation over holes
- Supply voltage ~100-240VAC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

kg 9,1 m³ 0.57

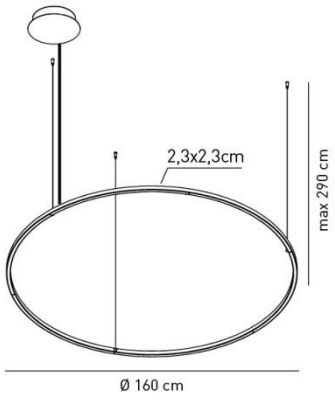

rosone standard /standard canopy



Product code composition

U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 160 LED	AN anthracite grey	XX standard canopy	LED 125W - diffused beam **3000K** other CCT available on request. please ask to our customer service.
		RU rust brown		

CE IP20 CRI90 dimmable 1-10V **LED** ~9900 lm 79 lm/W 100-240VAC

example composition code | SP | ULA160LED | AN | XX |

Available colors



AN
Anthracite grey



RU
Rust brown

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER_____ NOTES_____

SPULA160LED _ _ XX

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

AXO LIGHT srl, via Moglianese 44 - 30037 Scorzè (VE), Italy - T +39 041 5845193 - F +39 041 5845060
axolight@axolight.it - www.axolight.it