

ROBOTIC 1 / 2



Podstawowe dane techniczne / Basic technical data:

Zasilanie: 230V 50/60Hz

Transformator/zasilacz w zestawie

Transformer/driver included

QR111: QR-LP111 / G53 / 50W/100W MAX

Edge.LED CoB: 6.5W / 12W

Dotyczy opraw / Applies to fixtures:

Robotic R1 2.0123, 2.0173

Robotic R2 2.0124










Robotic Q1 2.0121, 2.0171

Robotic R1 edge.LED 2.0708, 2.0709

Robotic R2 edge.LED 2.0716, 2.0717

Robotic Q1 edge.LED 2.0712, 2.0713

ROZSTAW OTWORÓW MONTAŻOWYCH OPRAWY
[mounting holes spacing]

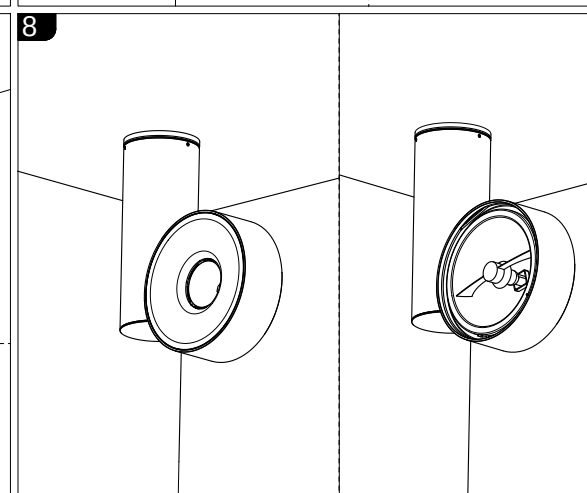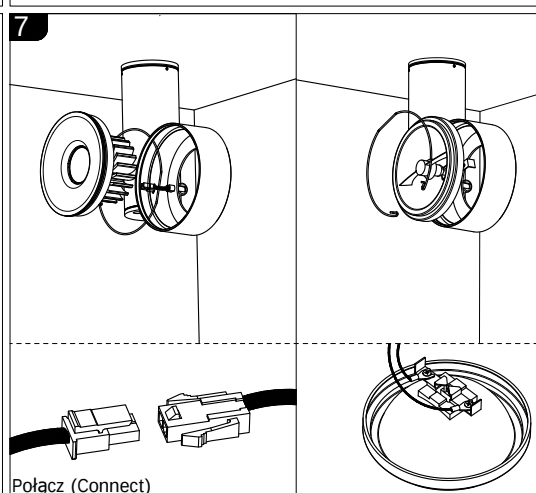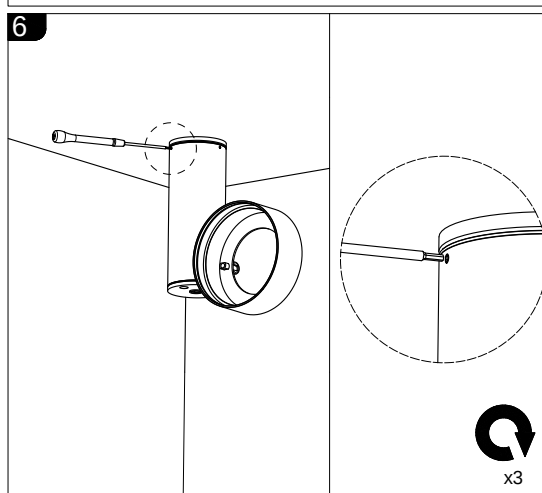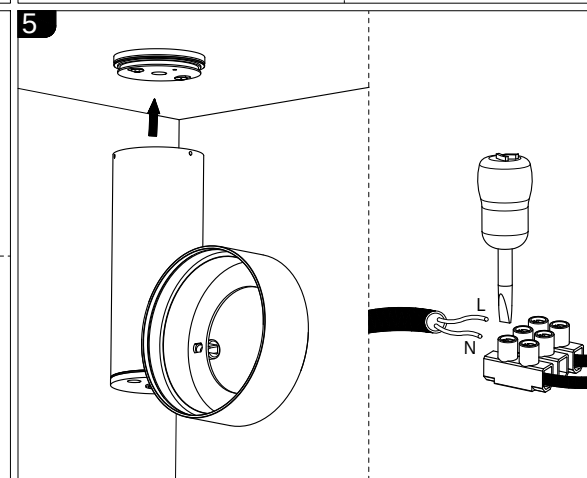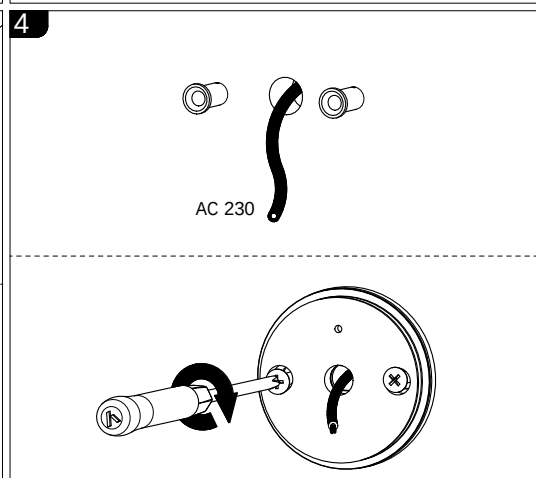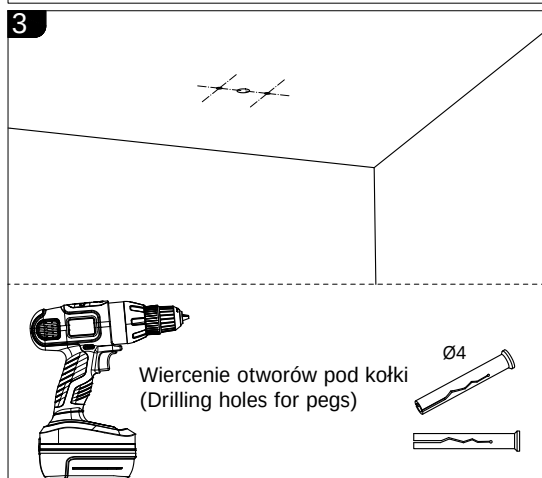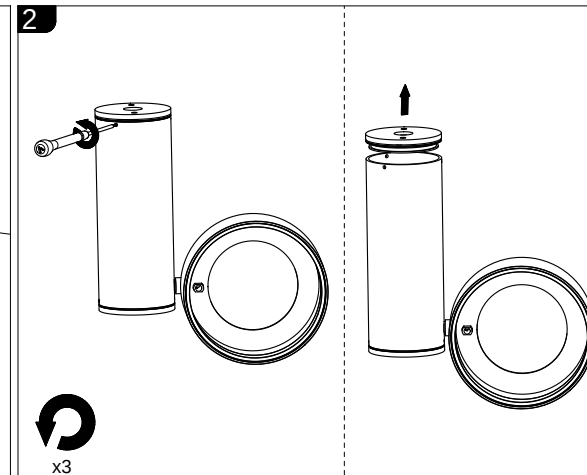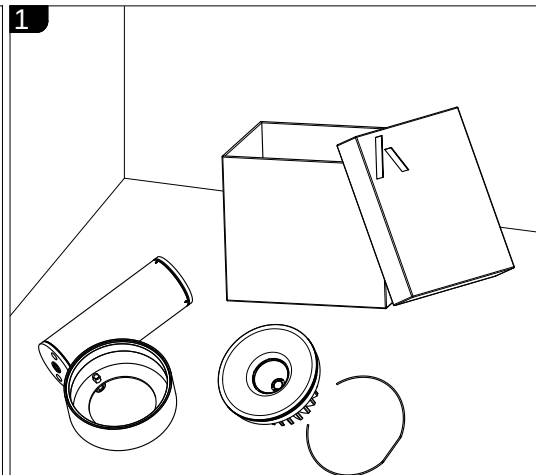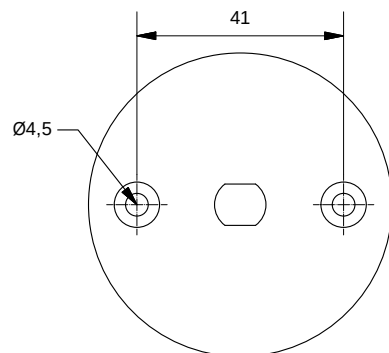

LABRA

LABRA Sp. z o.o.
biuro@labra.pl / export@labra.pl
+48 500 175 552 / www.labra.pl