

BALANCE

Design by Jordi Vilardell.

Reference

5192.

Application

Floor Lamps

Description

Floor light which also acts as a ceiling light. Designed by Jordi Vilardell. Thanks to a small pull chord located at the bottom of the aluminium-weft shade, which also serves as a switch, the shade can be moved to the right or left and up and down while remaining parallel to the floor at all times. It has a dimmer switch in the cable. Available in chrome and matt nickel.

Diffuser

Aluminium-weft diffuser

Materials

Vertical tube: Aluminum

Base: Steel

Arm: Stainless steel

Shade: Aluminum-weft

Finish



5192-01 Chrome (Metallic finish)




5192-18 Graphite (RAL 7016)



5192-30 Matt nickel (Metallic finish)

Sketch



Electrical characteristics

3 x E27 230V 70W Eco



Total 210.0 W



VIBIA



Fixture: 839 lm 4 lm/W

Driver included: 220-240V 50/60Hz

Electronic dimming TRIAC

Technical characteristics

- Dimmer switch on the cable

Physical characteristics

3 Box / 2.44 x 0.18 x 0.19 m. / Vol. 0.3416 m³ /

Gross weight 52.8 kg. / Net weight 47.5 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 43.70%

Coordinate system : CG

Total flux : 1920.00 lm

Maximum value : 88.28 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

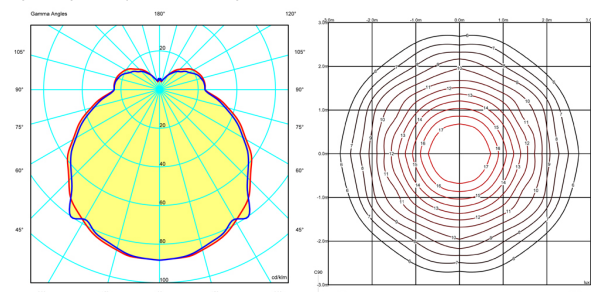

Certificates

